

Homelift TV-300 / TV-301



SINGLE-FAMILY HOUSES · MULTISTOREY HOME ENTRANCES · SHOPS · OFFICE BUILDINGS



Onlevel Elevators are conceived to provide solutions to people with impaired mobility at homes or public storey buildings.







Onlevel is the solution to improve the standard of life, as it eases the access between floors and allows a better performance in daily activities.









Maximum reliability

Our elevators have been designed under the strictest security criteria. That is why they are certified as one of the most reliable products on the market in our area.






Always with the maximum security for their run.







Design according to the aesthetics of your business or home.

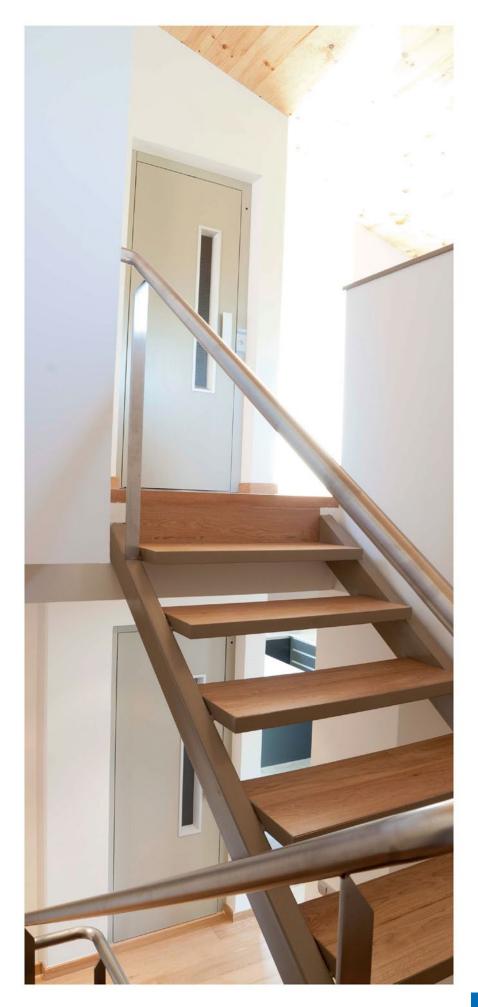





Comfort and convenience at your home, their electrical consumption is minimum, similar to any household appliance.















CABIN MODELS



K01 Mod.



K10 Mod.



Design your own cabin with your finishing choice





M06 Mod.

Panoramic Mod.



M05 Hercules Oak

M06 Sabi Elm

M07 Steppe Ash



M08 Jet Oak

- Mirror vertical or 1/2 panel
- Control panel long
- Different varieties of ceilings
- Different types of flooring



FINISHING

Ceiling standard / option SS















Black 250 kg.

T02 Ball

T03 Square

T04 Line

T05 Oriental

Rubber Flooring



S01 Black

S02 Grey

Grey



Stone Flooring (extra)



SP01 White cristal



SP03 Pink Galicia



Black



Aluminium

Stoneware Flooring (extra)



ATTENTION PLEASE: The printing of this brochure does not guarantee fidelity regarding the materials' finishings. We recommend you make the decision about your finishing via the colour samples provided by our technicians.



DOORS

Landing doors





Hinged door RAL 7032





3 PANEL 2 PANEL PANORAMIC

Hinged door RAL 7032




Cabin doors





Automatic doors

Photoelectric barrier



BUS style door

HANDRAIL

Standard



CHARACTERISTICS

- Capacity until 5 people (250Kg 315kg 385kg)
- Travel until 15 m
- · Maximum stops: 6
- Pit 200 mm
- Headroom 2400 mm
- Speed 0.15 metres per sec.
- Maximum cabin: 1100 mm x 1400 mm (side guides)
- Minimum shaft: 850 x 850mm
- Walking resistant roof and maintenance control panel
- Preassembled guides, provided with wall brackets 60mm adjustable
- Electrical supply and motor power: 3hp 220v. Maximal consumption 2,2kW
- Cabin regulation: side, front and diagonal
- Complete installation of the lift without any soldering iron

All our products are conceived under the regulations and rules: EN 81-41 Directive 2006/42/CE EN 1050:1997 / EN 12100-2:2004







+34 936 249 930

info@onlevel.es www.onlevelquality.com

